

ANTI-MOULD ACRYLIC MATT

MOULD INHIBITING COATING WHICH PROTECTS AGAINST ALGAL AND FUNGAL GROWTH

PERFORMANCE ADVANTAGES

- > Mould inhibiting
- > Protects against algal and fungal growth
- > Smooth matt finish
- Can be left as a finish in its own right where conditions are conducive to mould growth



BEFORE AFTER

USES

In areas where conditions are prone to mould growth, eg. food preparation areas, bathrooms and cellars.

- > Can be brush, roller or airless spray applied.
- > For interior use only.

NOTE: THIS DOES NOT REMOVE THE NEED TO REPAIR ANY STRUCTURAL FAULTS WHICH ALLOW WATER TO PENETRATE INTO THE FABRIC OF THE WALL.

COLOUR RANGE

>White.

PACK SIZE

> Available in 2.5 and 5L containers.

SPREADING RATE

- > Up to 11 square meters per litre depending on the moisture and porosity of the surface being painted.
- > Apply 2 coats.

IT IS IMPORTANT TO ENSURE THAT THIS TOTAL FILM THICKNESS IS ACHIEVED - DO NOT OVERSPREAD.

MADE IN BRITAIN

DRYING TIME

- > Touch dry in 2-3 hours.
- > Recoatable after 4 hours.

Curing of the coating can be extended at lower temperatures.

SHELF LIFE

- > Up to 12 months if stored correctly in an unopened container.
- > Store within the temperature range 5°C 25°C
- > PROTECT FROM FROST

PREPARATION

- > All surfaces to be painted should be clean, dry and free from loose and flaking material.
- > Rub down previously gloss painted surfaces with fine waterproof abrasive paper and rinse thoroughly.
- > Avoid the inhalation of dust.
- > Wear a suitable face mask if dry sanding.
- > Treat any mould or lichen with Britannia's Fungicidal Wash Solution before removing with a scraper or stiff brush, then treat again.

APPLICATION

- > STIR WELL BEFORE USE.
- > Ensure maximum ventilation during application and drying.
- > Do not breathe spray, wear respiratory protection.
- > Seal absorbent surface with a first coat thinned down with up to 10% clean water.

CLEANING


- > Remove as much product as possible from application equipment before cleaning.
- > Replace lid firmly.
- > Clean equipment immediately after use with warm soapy water and rinse thoroughly.

PRECAUTIONS

- > Keep out of reach of children.
- > In case of contact with eyes wash immediately with plenty of water.
- > Remove splashes from skin with soap and water or a recognised hand cleaner.
- > Protect from freezing.
- > Do not apply when the air or substrate temperatures are likely to fall below 10°C.
- > Do not use near fishponds.

HEALTH AND SAFETY

- > Please refer to the Safety, Health and Environmental Information on the container.
- > Take special precautions during the surface preparation of pre 1960's painted surfaces as they may contain harmful lead.
- > For further information contact the Britannia Sales Line on 01606 834015.
- > When preparing the surfaces avoid the inhalation of dust and/or metal particles.
- > Wear a suitable facemask.
- > Store in secure dry conditions inaccessible to children or animals.
- > Containers should be kept closed during storage.
- > Do not empty into drains, watercourses or access routes to septic tanks.
- > Material Safety Data Sheets for this and all other Britannia Paints products are freely available from the place of purchase or the address below.

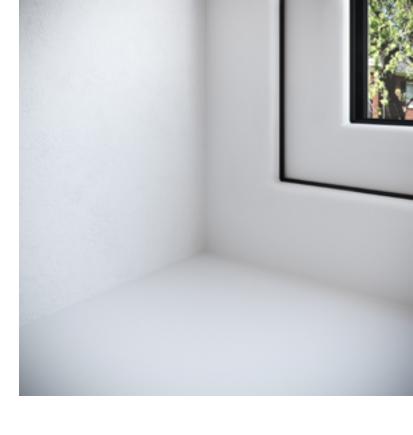

GENERAL INFORMATION

- > Apply all products in accordance with BS 6150: Code of practice for painting of buildings and BS 8000: Part 12: 1989 Code of practice for decorative wallcoverings and painting.
- > Under normal and frost free conditions this product will remain usable for up to one year if stored correctly and unopened.
- > Every care is taken to ensure that all information provided on this Technical Data Sheet is accurate.
- > Britannia Paints are unable to guarantee results as it has no control over the conditions under which its products are applied.
- > For help or more information contact the Customer Relations Team on 01606 834015.
- > Before using this product please ensure you have the latest information.
- > The information is correct at date of issue March 2023.







